

**Total Maximum Daily Load (TMDL) Study  
For Waterbodies in the Vicinity of the I-93 Corridor  
from Massachusetts to Manchester, NH:**

**Policy-Porcupine Brook in Salem and Windham, NH**



*Photo Credit: New Hampshire Department of Transportation*

April 18, 2008



**Total Maximum Daily Load (TMDL) Study  
For Waterbodies in the Vicinity of the I-93 Corridor  
from Massachusetts to Manchester, NH:**

**Policy-Porcupine Brook in Salem and Windham, NH**

**STATE OF NEW HAMPSHIRE  
DEPARTMENT OF ENVIRONMENTAL SERVICES  
29 HAZEN DRIVE  
CONCORD, NEW HAMPSHIRE 03301**

**THOMAS S. BURACK  
COMMISSIONER**

**HARRY T. STEWART, P.E.  
DIRECTOR  
WATER DIVISION**

**PREPARED BY  
PHIL TROWBRIDGE, P.E.  
WATERSHED MANAGEMENT BUREAU**

**April 18, 2008**

**Table of Contents**

**1. INTRODUCTION..... 1**

**2. PROBLEM STATEMENT ..... 1**

    A. WATERBODY DESCRIPTION ..... 1

    B. APPLICABLE WATER QUALITY STANDARDS AND WATER QUALITY NUMERIC TARGETS..... 3

**3. POLICY-PORCUPINE BROOK RECEIVING WATER QUALITY CHARACTERIZATION ..... 5**

**4. SOURCE CHARACTERIZATION..... 8**

**5. TMDL AND ALLOCATIONS ..... 10**

    A. DEFINITION OF A TMDL ..... 10

    B. DETERMINATION OF TMDL..... 10

*i. Seasonal Considerations/Critical Conditions ..... 10*

*ii. Margin of Safety ..... 11*

*iii. TMDL Calculation..... 11*

*iv. Allocation of Loads ..... 13*

**6. IMPLEMENTATION PLAN ..... 15**

    A. STATUTORY/REGULATORY REQUIREMENTS ..... 15

    B. DESCRIPTION OF ACTIVITIES TO ACHIEVE THE TMDL ..... 15

*i. Implementation Plan..... 15*

*ii. Monitoring ..... 15*

**7. PUBLIC PARTICIPATION ..... 16**

    A. DESCRIPTION OF THE PUBLIC PARTICIPATION PROCESS ..... 16

    B. PUBLIC COMMENT AND DES RESPONSE ..... 16

**8. REFERENCES..... 26**

**List of Tables**

Table 1: Land use in the Policy-Porcupine Brook watershed ..... 1

Table 2: Designated Uses for New Hampshire Surface Waters ..... 4

Table 3: Sources of Salt to the Policy-Porcupine Brook Watershed..... 8

Table 4: Factors for Determining Critical Conditions ..... 11

Table 5: Existing Salt Imports and Load Allocations ..... 14

**List of Figures**

Figure 1: Impaired Assessment Units and Water Quality Violations in the Policy-Porcupine Brook Watershed ..... 2

Figure 2: Time Series of Temperature, Chloride, Stream Flow and Chloride Export at Station I93-POL-01V..... 6

Figure 3: Concentration-Flow Duration Plot for Station I93-POL-01V ..... 7

Figure 4: Relative Contribution of Each Source to the Total Salt Imports to the Watershed ..... 9

Figure 5: TMDL Load Duration Curve at Station I93-POL-01V ..... 12

## 1. Introduction

Section 303(d) of the Clean Water Act (CWA) and Environmental Protection Agency's Water Quality Planning Regulations (40 CFR Part 130) require states to develop total maximum daily loads (TMDLs) for water quality limited segments that are not meeting designated uses under technology-based controls for pollution. The TMDL process establishes the allowable loadings of pollutants for a waterbody based on the relationship between pollutant sources and instream water quality conditions, so that states can establish water quality based controls to reduce pollution from both point and non-point sources and restore and maintain the quality of their water resources.

The purpose of this study is to develop a TMDL for chloride in the Policy-Porcupine Brook watershed located in the towns of Salem and Windham, N.H. The goal is to reduce chloride loads so that water quality standards for all the designated uses affected by chloride pollution are met in all areas of the Policy-Porcupine Brook watershed.

## 2. Problem Statement

### a. Waterbody Description


The assessment unit for this TMDL is Policy-Porcupine Brook (NHRIV700061102-18). It is a stream segment of 8.3 miles located in Salem and Windham, N.H. The watershed for this assessment unit is 10.18 square miles, stretching from Canobie Lake in the north to the Salem rest area on I-93 northbound in the south (Figure 1). Land use characteristics of the watershed are listed in Table 1. Downstream of the watershed, Policy Brook discharges to the Spickett River in Methuen, Mass.

**Table 1: Land use in the Policy-Porcupine Brook watershed**

| Land Use and Demographics       | Policy-Porcupine Brook Watershed | Units         |
|---------------------------------|----------------------------------|---------------|
| Agriculture                     | 3.47                             | % of area     |
| Cleared                         | 18.77                            | % of area     |
| Developed                       | 18.13                            | % of area     |
| Forested                        | 34.97                            | % of area     |
| Transportation                  | 14.83                            | % of area     |
| Wetland                         | 9.81                             | % of area     |
| Drainage Area                   | 10.18                            | Square miles  |
| Population                      | 10,463                           | People        |
| Housing Units                   | 4,310                            | Number        |
| Population Density              | 1,027                            | People/sq.mi. |
| "Urbanized Area" Classification | 98.4%                            | % of area     |

*Data Source: DES (2007b)*

Figure 1: Impaired Assessment Units and Water Quality Violations in the Policy-Porcupine Brook Watershed

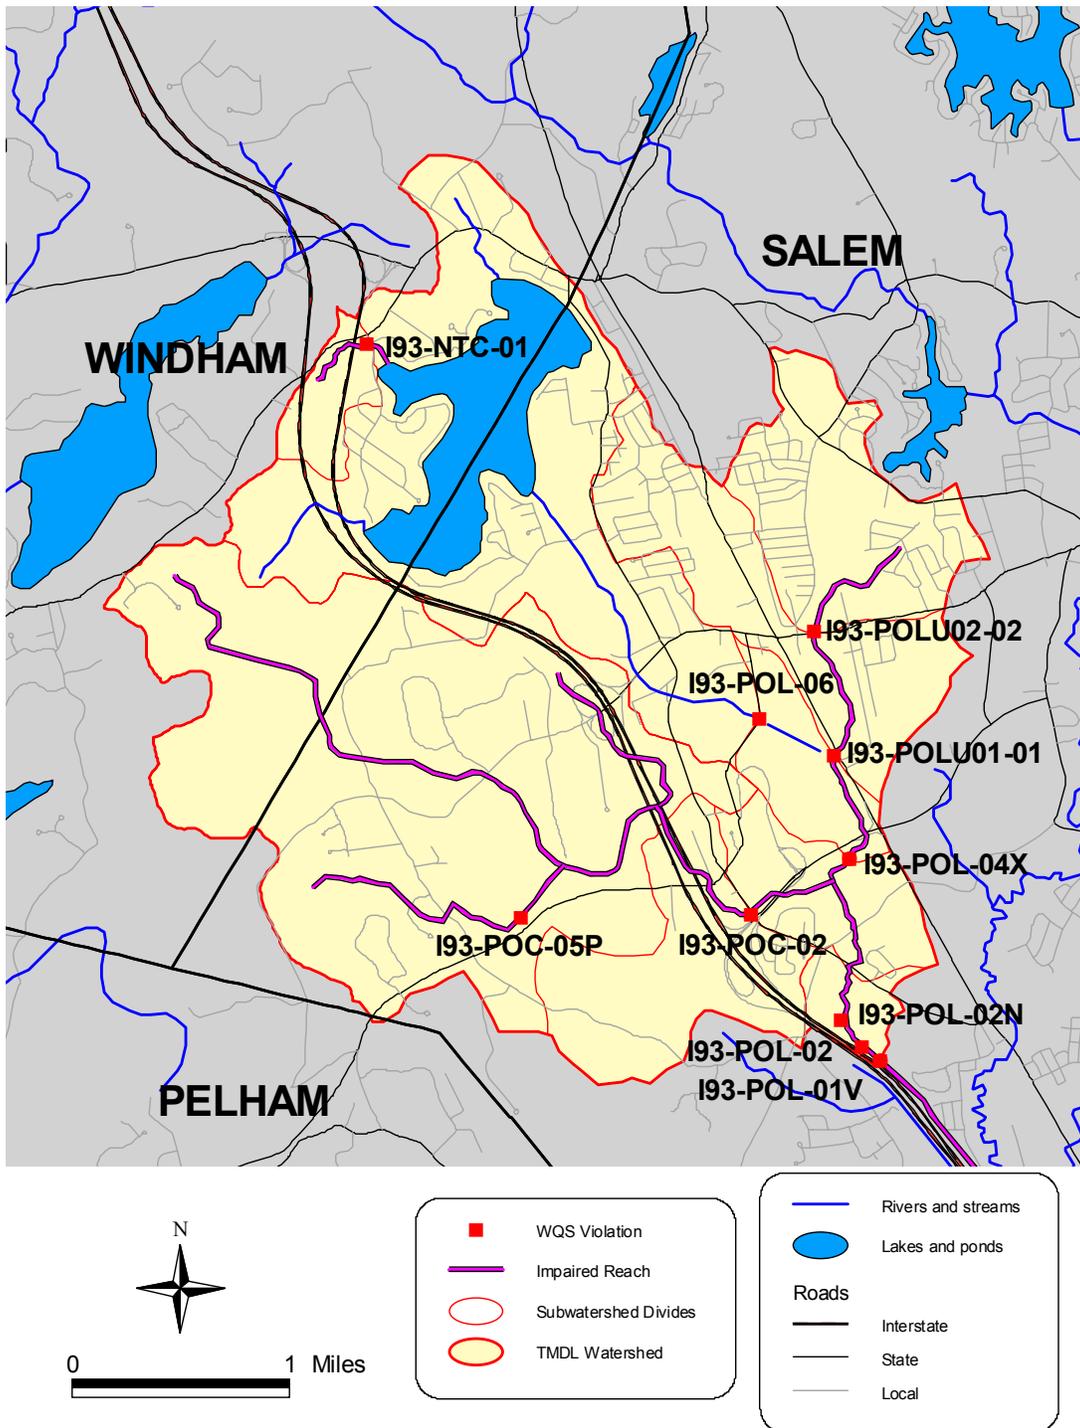

---

## **b. Applicable Water Quality Standards and Water Quality Numeric Targets**

Water Quality Standards determine the baseline water quality that all surface waters of the State must meet in order to protect their intended (designated) uses. They are the "yardstick" for identifying where water quality violations exist and for determining the effectiveness of regulatory pollution control and prevention programs. The standards are composed of three parts: designated uses; criteria; and antidegradation regulations.

In New Hampshire, all state surface waters are classified as either Class A or Class B, with the majority of waters being Class B. A general description of designated uses for each classification may be found in state statute, RSA 485-A. According to New Hampshire's Consolidated Assessment and Listing Methodology (CALM; DES, 2005), designated uses for New Hampshire surface waters include those shown in Table 2.

The second major component of water quality standards is the "criteria." These are numeric or narrative criteria which define the water quality requirements for Class A or Class B waters. Criteria assigned to each classification are designed to protect the designated uses for each classification. A waterbody that meets the criteria for its assigned classification is considered to meet its intended use. Water quality criteria for each classification may be found in RSA 485-A:8, I-V [[www.gencourt.state.nh.us/rsa/html/L/485-A/485-A-8.htm](http://www.gencourt.state.nh.us/rsa/html/L/485-A/485-A-8.htm)] and in the State of New Hampshire Surface Water Quality Regulations (Env-Ws 1700) [[www.des.nh.gov/rules/env-ws1700.pdf](http://www.des.nh.gov/rules/env-ws1700.pdf)]. The CALM (DES, 2005) describes the methodologies for comparing water quality data with the criteria to assess designated use support.

The third component of water quality standards consists of antidegradation provisions which are designed to preserve and protect the existing beneficial uses of the State's surface waters and to limit the degradation allowed in receiving waters. Antidegradation regulations are included in Part Env-Ws 1708 of the New Hampshire Surface Water Quality Regulations. Antidegradation is not a consideration for this TMDL study.

Policy-Porcupine Brook is a Class B waterbody. According to Env-Ws 1703.21, the water quality criteria for chloride in nontidal Class B waterbodies to protect aquatic life is that concentrations should not exceed 860 mg/L for acute exposures or 230 mg/L for chronic exposures. Acute aquatic life criteria are based on an average concentration over a one-hour period and chronic criteria are based on an average concentration over a period of four days (EPA, 1991). The frequency of violations for either acute or chronic criteria should not be more than once every three years, on average (EPA, 1991).

**Table 2: Designated Uses for New Hampshire Surface Waters**

| <b>Designated Use</b>                         | <b>DES Definition</b>   | <b>Applicability</b>     |
|---|---|--------------------------|
| Aquatic Life                                  | Waters that provide suitable chemical and physical conditions for supporting a balanced, integrated and adaptive community of aquatic organisms.  | All surface waters       |
| Fish Consumption                              | Waters that support fish free from contamination at levels that pose a human health risk to consumers.  | All surface waters       |
| Shellfish Consumption                         | Waters that support a population of shellfish free from toxicants and pathogens that could pose a human health risk to consumers.                 | All tidal surface waters |
| Drinking Water Supply                         | Waters that with adequate treatment will be suitable for human intake and meet state/federal drinking water regulations.                          | All surface waters       |
| Primary Contact Recreation<br>(i.e. swimming) | Waters suitable for recreational uses that require or are likely to result in full body contact and/or incidental ingestion of water.             | All surface waters       |
| Secondary Contact Recreation                  | Waters that support recreational uses that involve minor contact with the water.  | All surface waters       |
| Wildlife                                      | Waters that provide suitable physical and chemical conditions in the water and the riparian corridor to support wildlife as well as aquatic life. | All surface waters       |

### **3. Policy-Porcupine Brook Receiving Water Quality Characterization**


In the winters ending in 2003, 2004, 2005 and 2006, the New Hampshire Department of Environmental Services (DES), the US Environmental Protection Agency (EPA), and the New Hampshire Department of Transportation (DOT) monitored chloride in watersheds in the vicinity of I-93 in southern New Hampshire. Chloride concentrations were primarily measured in winter with near continuous specific conductance readings by data loggers<sup>1</sup>. DES placed the assessment unit NHRIV700061102-18 on New Hampshire's 2006 Section 303(d) list because measurements of chloride concentrations through 2005 demonstrated exceedences of State surface water quality standards. The assessment unit is also impaired for aquatic life use support due to pH, benthic macroinvertebrate assessment and benthic habitat assessment. This assessment unit, along with all rivers and lakes in the state, was listed as impaired for the fish consumption designated use due to the state-wide fish consumption advisory for mercury.

For this TMDL study, DES, EPA and DOT developed a monitoring program to collect a comprehensive and standardized dataset for chloride, stream flow, and chloride imports to and exports from the watershed (DES, 2006). The monitoring plan was implemented between July 1, 2006 and June 30, 2007. The data from this monitoring program have been summarized in a Data Quality Audit (DES 2007a) and a Data Report (DES 2007b). The difference between the TMDL monitoring and the previous efforts is that data were collected at the same time at all stations to allow comparison between stations under similar conditions. Stream flow data were collected so that chloride flow duration curves and export calculations could be made. Figure 2 shows the near continuous measurements of temperature, chloride, stream flow, and chloride export (product of chloride concentration and stream flow) at the outlet station, I93-POL-01V, between July 1, 2006, and June 30, 2007. The average values for these parameters over the year were 10.75 °C, 163.02 mg Cl/L, 15.72 cfs, and 1562.83 tons Cl/yr, respectively. For perspective, typical concentrations of chloride in New Hampshire rivers in 1920, before salt was used as a deicer, were 1.3 mg Cl/L (Hall, 1975).

---

<sup>1</sup> Data loggers are devices which can be programmed to read and store values from sensors deployed in the field at a set frequency. For this study, data loggers were used to record measurements of water temperature and specific conductance in various streams every 15 minutes.

Figure 2: Time Series of Temperature, Chloride, Stream Flow and Chloride Export at Station I93-POL-01V

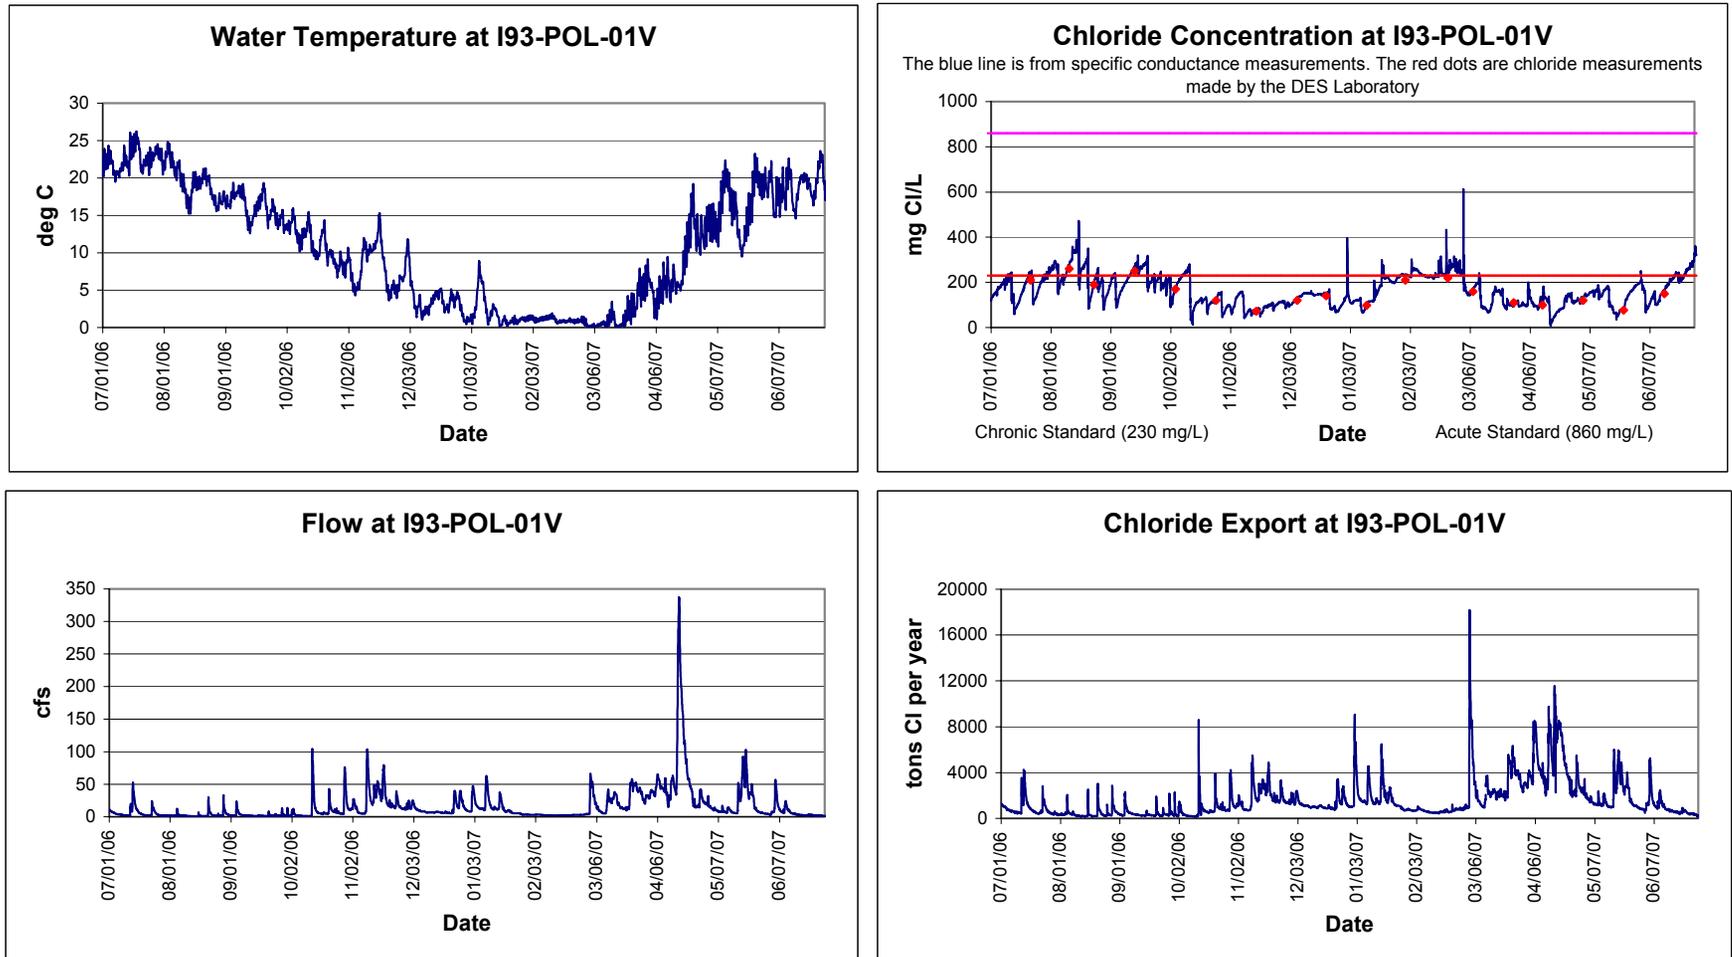


Data Source: DES (2007b)

The monitoring for the TMDL study detected violations of both the acute and chronic standards. At the outlet station for the Policy-Porcupine Brook watershed, I93-POL-01V, the water quality violated the chronic standard for 87.7 days of the year (24 percent). At station I93-POL-04X, which was farther upstream (Figure 1), three violations of the acute standard were detected, along with 66 days in violation of the chronic standard (18 percent). All of the locations in the watershed at which violations of water quality standards have been detected are shown in Figure 1. The violations on this figure are from a compilation of all relevant data from 2002-2007 (DES, 2007b). The number of violations and the exact dates when these violations occurred are summarized in a data report (DES, 2007b). Two of the violations occurred on river reaches which were not part of the impaired reach for this TMDL. The violation northwest of Canobie Lake (station I93-NTC-01) will be the subject of a separate TMDL. The violation at I93-POL-06 was not included in the 2006 listing because it occurred after the 2006 Section 303(d) list was created.

Concentration-flow duration curves were used to document how the chloride concentration changed with stream flow (DES, 2007b). For these plots, the measured stream flow on a date was converted to the percent of the time when that flow level is exceeded. The methods for the historical flow duration calculations are provided in a data report (DES, 2007b). The concentration-flow duration plot for the outlet station for this watershed, I93-POL-01V, is shown in Figure 3. This figure indicates that the highest concentrations occur when stream flows are low (flow exceedence percentiles of 60-90 percent, “dry conditions”). Violations of the water quality standard occur in all seasons. Therefore, low stream flow is the critical condition for violations, regardless of season.

**Figure 3: Concentration-Flow Duration Plot for Station I93-POL-01V**

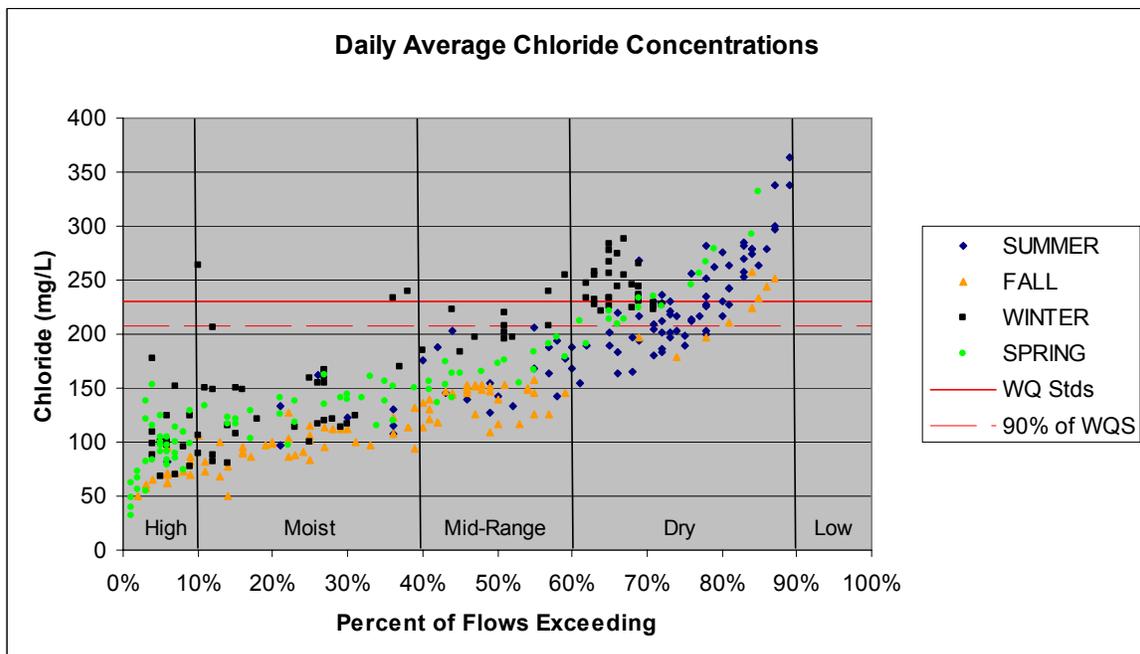

Data Source: DES (2007b)

## 4. Source Characterization

Chloride in the form of salt is imported to the study watersheds from several major sources: Roadway deicing, food waste (e.g., sewage), water softeners, atmospheric deposition, and roadway salt pile runoff. DES estimated the mass of salt imported from each source. Details on how these estimates were made are provided in a data report (DES, 2007b). For the TMDL, groundwater was considered a pathway for chlorides, not an independent source.

All of the chloride imported to the watershed is eventually delivered to the impaired reach through stormwater runoff and groundwater flow. Stormwater flow through municipal storm sewer systems (MS4) covered by the Phase II stormwater program regulations will be considered a point source for this TMDL (EPA, 2002). The balance of the stormwater runoff will be considered a non-point source. Ninety-eight percent of the watershed is covered by the MS4 Phase II program (Table 1); therefore, most (98.4 percent) of the chloride load will be considered a point source.


The salt imports for the period July 1, 2006 to June 30, 2007 are listed by source in Table 3. A total of 4,814.3 tons of salt was imported to the watershed at an average rate of 473 tons of salt per square mile of drainage area. The contribution of each source to the total load is shown in Figure 4. Deicing of roadways and parking lots accounted for 89 percent of the imports, with parking lots being the single largest source (50 percent). Salt pile runoff contributed 7 percent of the total. Water softeners, food waste, and atmospheric deposition were minor components.

**Table 3: Sources of Salt to the Policy-Porcupine Brook Watershed**

| Source                 | Agency/Town  | Salt Imports<br>(tons salt/yr) |
|------------------------|--------------|--------------------------------|
| State Roads            | NHDOT PS 514 | 160.5                          |
|                        | NHDOT PS 528 | 295.6                          |
| Municipal Roads        | Salem        | 1,247.9                        |
|                        | Windham      | 57.8                           |
| Private Roads          | Salem        | 119.6                          |
|                        | Windham      | 5.4                            |
| Parking Lots           | Salem        | 2,379.1                        |
|                        | Windham      | 47.3                           |
| Salt Piles             | Salem        | 315.2                          |
| Water Softeners        | NA           | 101.8                          |
| Food Waste             | NA           | 52.3                           |
| Atmospheric Deposition | NA           | 31.9                           |
| Total                  |              | 4,814.3                        |

Data Source: DES (2007b)

**Figure 4: Relative Contribution of Each Source to the Total Salt Imports to the Watershed**

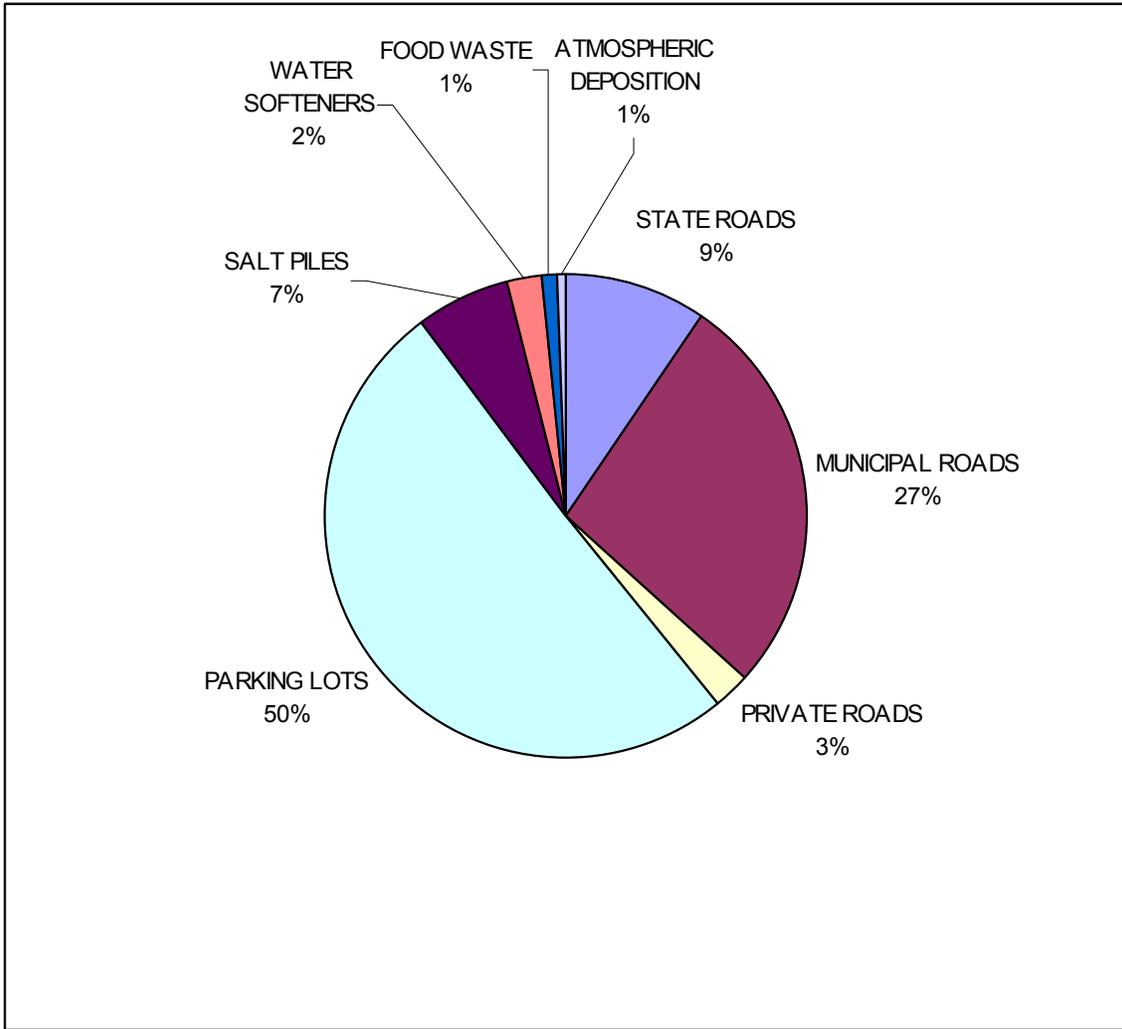

Data Source: DES (2007b)

## 5. TMDL and Allocations

### **a. Definition of a TMDL**

According to the applicable federal regulations, 40 CFR Part 130.2, the total maximum daily load (TMDL) for a waterbody is equal to the sum of the individual loads from point sources (i.e., waste load allocations or WLAs), and load allocations (LAs) from nonpoint sources (including natural background conditions). Section 303(d) of the CWA also states that the TMDL must be established at a level necessary to implement the applicable water quality standards with seasonal variations and a margin of safety (MOS), which takes into account any lack of knowledge concerning the relationship between effluent limitations and water quality. In equation form, a TMDL may be expressed as follows:

$$TMDL = WLA + LA + MOS$$

where:

*WLA* = Waste Load Allocation (i.e., loadings from point sources)

*LA* = Load Allocation (i.e., loadings from nonpoint sources including natural background)

*MOS* = Margin of Safety

TMDLs can be expressed in terms of either mass per time, toxicity, or other appropriate measure (40 CFR, Part 130.2 (i)). The Policy-Porcupine Brook TMDL will be expressed as a load duration curve following guidance from EPA (EPA, 2007). The MOS can be either explicit or implicit. If an explicit MOS is used, a portion of the total allowable loading is actually allocated to the MOS. If the MOS is implicit, a specific value is not assigned to the MOS. Use of an implicit MOS is appropriate when assumptions used to develop the TMDL are believed to be so conservative that they are sufficient to account for the MOS.

### **b. Determination of TMDL**

#### **i. Seasonal Considerations/Critical Conditions**

Section 303(d) of the CWA states that the TMDL must be established at a level necessary to attain the applicable water quality standards with seasonal variations. In Table 4, the factors which can influence chloride concentrations have been listed, along with how those factors will be manipulated to ensure that the TMDL will result in attainment of water quality standards during critical conditions.

**Table 4: Factors for Determining Critical Conditions**

| <b>Factor</b>          | <b>Effect on Chloride Concentration</b>  | <b>Selection of Critical Condition</b>   |
|------------------------|--|--|
| Season                 | The effect of seasons on chloride concentrations is small. Figure 3 shows that violations occur at low flows regardless of season                                      | None   |
| Stream Flow            | Figure 3 shows that chloride concentrations increase as stream flows decrease. The critical hydrologic condition is 60-90 percent flow exceedences (“dry conditions”). | The TMDL will be expressed as a load duration curve to accurately describe the acceptable load at each stream flow.  |
| Location               | The proximity of salt sources can affect the chloride concentration in the waterbody.  | Data from the year round station with the most violations of the water quality standard will be the basis for the TMDL.  |
| Water Quality Standard | Either the acute or chronic water quality standard must be chosen to set the target for the TMDL.  | The chronic standard will be the basis for the TMDL target because most of the violations in the watershed were of the chronic standard. The chronic standard is also lower than the acute standard. |

### **ii. Margin of Safety**


An explicit Margin of Safety (MOS) will be used in the TMDL calculation. The TMDL will be set at 90 percent of the chronic water quality standard ( $90\% \times 230 \text{ mg Cl/L} = 207 \text{ mg Cl/L}$ ). This assumption is equivalent to holding 10 percent of the loading in reserve to account for scientific uncertainty.

### **iii. TMDL Calculation**

The TMDL will be expressed as a load duration curve following guidance from EPA (EPA, 2007) and in compliance with the approved Quality Assurance Project Plan (DES, 2006). The TMDL will be 90 percent of the chronic water quality standard (207 mg Cl/L) multiplied by each stream flow in the four-day average flow duration curve. The four-day average flow duration curve was used because the chronic water quality standard applies to four-day average concentrations. The TMDL will be set for the outlet station of the watershed, I93-POL-01V, because this station had the most violations of the water quality standard for the year-round stations in the watershed. Further, the chloride dynamics at I93-POL-01V were similar to those at upstream stations such as I93-POL-04X. Figure 5 shows the TMDL load duration curve and the existing loads measured at I93-POL-01V between July 1, 2006 and June 30, 2007. The units for the TMDL are tons of chloride per day. At each point on the TMDL curve, the waste load allocation for MS4

permittees is 98.4 percent of the TMDL and the load allocation for non-point sources is 1.6 percent of the TMDL (not shown on figure). The margin of safety is explicit. The TMDL load duration curve is not expected to change; therefore, this TMDL is relevant to all existing and future impairments due to chloride in the Policy-Porcupine Brook watershed.

Figure 5: TMDL Load Duration Curve at Station I93-POL-01V

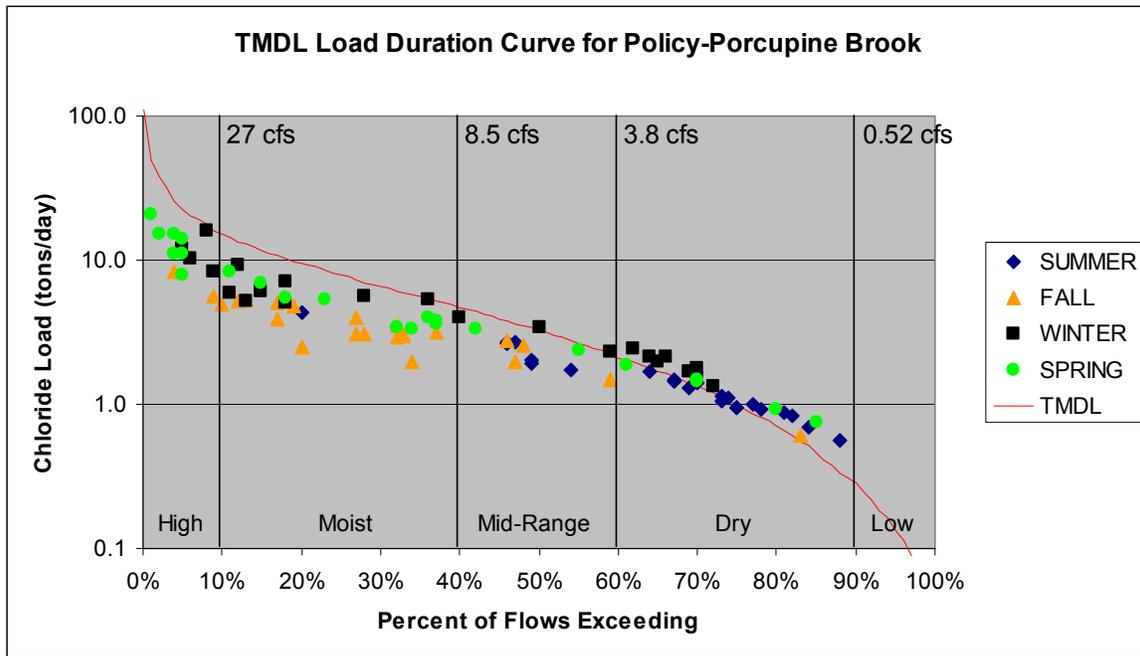

The TMDL can be alternatively expressed as a percent reduction goal (PRG) to guide implementation. The method for calculating the PRG was described in the approved Quality Assurance Project Plan (DES, 2006). In summary, each individual chloride export value was compared to the TMDL. If the value was higher than the TMDL, the percent by which this value would need to be reduced to reach the TMDL was calculated. All of the individual PRGs calculated for the “dry” hydrologic condition were grouped and the 90<sup>th</sup> percentile value calculated (DES, 2007b). The four-day averaging period was used for this calculation to be consistent with the chronic water quality standard and the TMDL load duration curve. For the Policy-Porcupine Brook watershed, the PRG was determined to be 24.5 percent for the July 1, 2006 to June 30, 2007 period. The total salt imports to the watershed during this period were 4,814 tons of salt per year. Therefore, salt imports to the watershed should be less than 3,635 tons of salt per year in order to attain water quality standards.

#### **iv. Allocation of Loads**

In 2006, DOT and DES established an interagency Salt Reduction Workgroup. The purpose of the workgroup is to advise DES and DOT on this TMDL and all other chloride TMDL studies in the I-93 corridor until these studies are completed, and then to advise and assist with implementation of required salt load reductions. The workgroup includes representatives from the following: DES; DOT; EPA; the Federal Highway Administration (FHWA); the selectmen's office of each town with area in a TMDL watershed; the public works department of each town with area in a TMDL watershed; the University of New Hampshire Technology Transfer (T2) Center; private winter road and parking lot maintenance companies; motorist associations; the State Police; the Southern New Hampshire Regional Planning Commission; the Nashua Regional Planning Commission; and the Rockingham Planning Commission. Representatives from pertinent watershed organizations and state-wide environmental organizations will be invited to join the workgroup in 2008.

**In 2008, the Salt Reduction Workgroup will determine the final load allocations by sector in the implementation plan. There will be an opportunity for public comment on the implementation plan. However, as a starting point, draft allocations are presented in Table 5 based on the following assumptions:**

- Ninety-six percent of the salt imports to the watershed were for deicing activities. Therefore, essentially all of the salt import reductions will need to come from reduced deicing loads. The percent reduction in salt imports will be the same for state, municipal, and private roads and parking lots.
- The allocation for salt pile runoff will be zero because all salt and salt-sand piles should be covered.
- The existing loads from water softeners, food waste, and atmospheric deposition will be used as the allocation for these sources.

**Table 5: Existing Salt Imports and Load Allocations**

| <b>Source</b>          | <b>Agency/Town</b> | <b>FY07 Salt Imports<br/>(tons salt/yr)</b> | <b>Allocation of Loads<br/>(tons salt/yr)</b> |
|------------------------|--------------------|---|---|
| State Roads            | NHDOT PS 514       | 160.5                                       | 128.3   |
|                        | NHDOT PS 528       | 295.6                                       | 236.4   |
| Municipal Roads        | Salem              | 1,247.9                                     | 997.9   |
|                        | Windham            | 57.8  | 46.2  |
| Private Roads          | Salem              | 119.6                                       | 95.6  |
|                        | Windham            | 5.4   | 4.3   |
| Parking Lots           | Salem              | 2,379.1                                     | 1,902.5                                       |
|                        | Windham            | 47.3  | 37.8  |
| Salt Piles             | Salem              | 315.2                                       | 0.0   |
| Water Softeners        | NA                 | 101.8                                       | 101.8   |
| Food Waste             | NA                 | 52.3  | 52.3  |
| Atmospheric Deposition | NA                 | 31.9  | 31.9  |
| Total                  |                    | 4,814.3                                     | 3,635.0                                       |

## **6. Implementation Plan**

### ***a. Statutory/Regulatory Requirements***

Section 303(d)(1)(C) of the CWA provides that TMDLs must be established at a level necessary to implement the applicable water quality standard. The following is a description of activities that are planned to abate water quality concerns in the Policy-Porcupine Brook watershed.

### ***b. Description of Activities to Achieve the TMDL***

#### **i. Implementation Plan**

To implement this TMDL, salt imports to the watershed for deicing must be limited to the allocated loads in Table 5. State law (RSA 485-A:12.II) provides that “If, after adoption of a classification of any stream, lake, pond, or tidal water, or section of such water, including those classified by RSA 485-A:11, it is found that there is a source or sources of pollution which lower the quality of the waters in question below the minimum requirements of the classification so established, the person or persons responsible for the discharging of such pollution shall be required to abate such pollution within a time to be fixed by the department.”

The details of an implementation plan will be developed by the Salt Reduction Workgroup in 2008 (see section 5(b)(iv) for information on the workgroup). The plan will require that owners of property on which salt is applied track and report the amount applied. This will be compared with allocations on an annual basis to determine compliance with RSA 485-A:12 and the load allocations of Table 5. It should be noted that the load allocations in the TMDL do not include an allowance for future growth, so any future construction of additional roads or parking lots in the Policy-Porcupine Brook watershed would necessitate additional load reductions elsewhere in the watershed beyond the allocations in Table 5.

The draft implementation plan will be made available for public comment after it is developed by the workgroup.

#### **ii. Monitoring**

Pending the availability of resources, specific conductance will be monitored at 15-minute intervals with data loggers at the outlet station for the watershed, I93-POL-01V, from July 1, 2007 to June 30, 2016. Stream flow will be measured at this station at least from July 1, 2007 to June 30, 2008, after which flow will be estimated using regression relationships with the USGS Beaver Brook gage. The data will be analyzed by DES for violations of the acute and chronic water quality standards and percent reduction for critical conditions following the procedures used in this report. The number of violations, the percent reduction goals during the critical conditions, and the salt imports to the watershed will be tracked for each year. DES will evaluate changes in these values using

multivariate linear or logistic regression with climate variables (e.g., the DOT Winter Severity Index, flow) as covariates. A trend will be considered significant if the coefficient of the year term in the equation is significant at the  $p < 0.05$  level. A minimum of five years of data (and most likely 10 years) will be needed before trend analysis can be performed. When chloride concentrations at I93-POL-01V meet water quality standards, data should be collected at all sites in the watershed where standards violations have been detected to verify that standards are met at all locations and under all conditions in the assessment unit. Biomonitoring should be completed after water quality standards for chloride have been met at station I93-POL-01V to verify that there are no additional impacts to aquatic life from chlorides or other contaminants.

## 7. Public Participation

### **a. Description of the Public Participation Process**

EPA regulations (40 CFR 130.7 (c) (ii)) require that calculations to establish TMDLs be subject to public review. The Policy-Porcupine Brook TMDL was released for public comment on October 29, 2007. The comment period lasted until December 31, 2007. The report was posted on the DES ([www.des.nh.gov/wmb/tmdl](http://www.des.nh.gov/wmb/tmdl)) and the Rebuilding I93 ([www.rebuildingi93.com](http://www.rebuildingi93.com)) websites. A letter announcing the release was distributed to 132 members of a stakeholder group, consisting of the Water Quality Standards Advisory Committee, the Lakes Management and Advisory Committee, the Rivers Management Advisory Committee, the Local River Management Advisory Committees, the New Hampshire Water Council, local and regional conservation organizations, and the Salt Reduction Workgroup. DES also issued a press release which generated stories in several local papers.

### **b. Public Comment and DES Response**

DES received comments from six organizations or individuals by the deadline:

- U.S. Environmental Protection Agency
- New Hampshire Department of Transportation
- Federal Highway Administration
- Conservation Law Foundation and the NH Rivers Council
- Sierra Club
- Geoffrey Ransom

DES paraphrased the comments from each letter and provided responses in the following sections.

#### Comments from the Environmental Protection Agency

1. Figure 5 is a visual representation of the TMDL or Total Maximum Daily Load. As such, it is important that stream flow (in cubic feet per second) is represented on the x-axis so that on any given day and associated stream flow, a daily load can be determined.

Category: Accept

---

Response: The stream flow in cubic feet per second associated with the 10<sup>th</sup>, 40<sup>th</sup>, 60<sup>th</sup>, and 90<sup>th</sup> percentiles of the flow will be added to Figure 5.

2. We would consider the margin of safety to be explicit and not implicit.

Category: Accept

Response: The text of the TMDL will be changed.

#### Comments from the New Hampshire Department of Transportation

1.1 The applicable water quality standard for the TMDL should be 250 mg Cl/L, not 230 mg Cl/L.

Category: No change

Response: The assessment unit for this TMDL is impaired for the aquatic life use support designated use. The EPA and DES standard for the protection of aquatic life is 230 mg Cl/L. DES conducted a review of the toxicological literature related to road salt (DES, 2007c). The report concluded that 230 mg Cl/L was the appropriate standard for the TMDL to be protective of humans, wildlife, aquatic organisms, and most vegetation. Therefore, by setting the TMDL at the level necessary to achieve the 230 mg Cl/L standard, the TMDL addresses impacts associated with chlorides on the instream, benthic, and riparian communities. The secondary drinking water standard for chloride is 250 mg Cl/L. This standard is based on taste and odor issues, not human health. It is not appropriate for the TMDL because it is not the lowest applicable water quality standard and is not related to the impaired designated use.

1.2 The ten percent margin of safety is too high given the large amount of data collected for this study.

Category: No change

Response: A margin of safety is required for the TMDL to account for any lack of knowledge concerning the relationship between pollutant loads and water quality (CWA §303(d)(1)(C), 40 C.F.R. §130.7(c)(1) ). DES selected ten percent as the margin of safety for the TMDL in the Quality Assurance Project Plan (DES, 2006), which was reviewed and approved by DOT, USGS, and EPA. There is not compelling evidence that the uncertainty in the relationship is greater than or less than ten percent. Furthermore, given the divergent comments on this topic (see CLF et al. comment 3.1), there is not consensus that a larger or smaller margin of safety should be adopted for policy reasons.

2.1 It is overly conservative to use the 90<sup>th</sup> percentile statistic to calculate the percent reduction goal. An alternative approach based on the distribution of percent reduction values should be used.

Category: No change

Response: The method for calculating the percent reduction goals for the TMDL was set forth in the Quality Assurance Project Plan, which was approved by DES, DOT, USGS, and EPA. DES is hesitant to change the method for calculating the percent reduction goal in order to maintain consistency with the approved plan for the study.

In their comments, DOT argued that outliers in the dataset skew the percent reduction calculation. What may look like outliers, however, are actually real and

representative measurements of water quality. The data used in the calculation were vetted by a QA/QC process, which included the identification and removal of outliers prior to calculation of the percent reduction goals. Moreover, there are no values more than three standard deviations away from the mean, which is a common definition of an outlier.

DOT also presented an alternative method for calculating the percent reduction goal from the distribution of percent reduction goals during the critical flow regime. For the Policy-Porcupine Brook TMDL, there were 20 unique, four-day periods during the “dry” flow condition during which the average chloride concentration exceeded the target (207 mg/L). The percent reduction needed to reach the target for each of these points was calculated. In order to aggregate these results into one percent reduction goal, DES calculated the 90<sup>th</sup> percentile of the distribution of 20 points (24.5%). This approach does not assume that the 20 points are normally distributed. As an alternative, DOT proposed to use the upper confidence limit of the mean value of the 20 points with a significance level of 0.003. The significance level of 0.003 was chosen because the water quality standard allows one violation every three years (1 in 273 unique, four-day periods or 0.003). DES has concerns about the method proposed by DOT for two reasons. First, the DOT method assumes that the individual percent reduction values are normally distributed. A histogram of the 20 values does not support this assumption. Moreover, DOT used the standard error of the mean to represent variability in the whole distribution. The probability of a water quality violation occurring should be calculated from the full distribution, not the distribution of the mean. If the standard deviation instead of the standard error of the mean is used in their calculation, the DOT method would predict that a 42.2 percent reduction goal should be used to protect against a 1 in 273 chance of a violation occurring. DES does not agree with the DOT method for the reasons stated above. The calculations provided in this paragraph are for illustration purposes only.

Ultimately, the goal of the TMDL is to eliminate water quality violations for chloride. The percent reduction goals stated in the TMDL are just a first approximation of what it will take to achieve water quality standards. As salt reduction efforts proceed in a phased way, the salt imports to the watersheds and the frequency of chloride violations will be monitored over time. When the water quality violations have ceased, the goal will be reached and no further reductions will be necessary.

2.2 The error in the salt imports for parking lots is larger than the required salt reductions.

Category: No change

Response: While there may be sizeable error in the salt import estimates for private parking lots, the estimates were made based on the best available science anywhere in the country. In fact, the import estimates used for the TMDL were based on locally derived data. Plymouth State University spent one year researching this issue through painstaking local data collection and nation-wide research (Sassan and Kahl, 2007). Better estimates for salt application by this sector do not exist. An accurate salt accounting system will be needed to reduce the error in the salt import estimates as we move forward with implementation.

- 3.1 The allocations of loads for the different sectors of salt applicators (e.g., state roads, municipalities, parking lot owners, etc.) should not be based on equal reductions by each sector. Factors such as public safety, roadway functionality, traffic volume, and vehicle speed should be considered when setting allocations.

Category: Carry forward to implementation plan

Response: This comment is relevant to the implementation plan, which has not yet been drafted. The comment will be carried forward to the Salt Reduction Workgroup to consider when developing the implementation plan. In the TMDL documents, the allocation of loads will continue to be based on equal reductions by sector. If the Salt Reduction Workgroup negotiates alternative allocations in the implementation plan, these new allocations will supersede the allocations in the TMDL report.

- 3.2 Variable levels of road salt treatment on highways as they pass in and out of the TMDL watersheds will cause hazards to motorists.

Category: Carry forward to implementation plan

Response: This comment is relevant to the implementation plan, which has not yet been drafted. The comment will be carried forward to the Salt Reduction Workgroup to consider when developing the implementation plan.

#### Comments from the Federal Highway Administration

- 1) Table of Contents, List of Figures, Pg i: Expand name of Figure 5 by adding “at I93-POL-01V”.
- 2) Pg 1, 1 Introduction. In Line 1 spell out Environmental Protection Agency the first time you use the acronym “EPA”.
- 3) Pg 1, 1 Introduction. In Line 3 is “water quality limited segments” correct?
- 4) Pg 1, 2a, Line 4. Reword to “...to the Salem rest area on I-93 northbound...”
- 5) Pg 1, Table 1: The percents of various land uses only add to 99.98%.
- 6) Pg 1, Table 1: In the Data Source the acronym of “DES” is used before it is defined.
- 7) Figure 1: It is difficult to distinguish the impaired reaches. What is the significance of the I93-NTC-01 and why does it use a different style of ID # than other sites? Is it because it is associated with Canobie Lake and others are associated with Policy – Porcupine Brooks? The “%” for “WQS Violation” in the Legend does not seem to be used. This is an important figure. Is it in color, which would help to identify details. I would recommend a larger scale for this figure.
- 8) Pg 3 second paragraph, Line 3: Shouldn’t “State Statute” be capitalized? Also I would think it would be helpful to include excerpts from RSA 485-A about Class a and B waters in an appendix in this report. Use DES again without explaining. Shouldn’t the CALM have the same web citation as used in the next paragraph?
- 9) Pg 3, third paragraph, Line 9, Use DES.
- 10) Pg 3, fourth paragraph, EPA is used twice without description.
- 11) Pg 3, fourth paragraph: Line 6 “... violations of for either ...” is incorrect.
- 12) Pg 5, first paragraph: Give descriptions for DES and EPA but used acronyms previously.
- 13) Pg 5, first paragraph, Lines 5 and 6: Need footnote to describe “data loggers”.

- 
- 14) Pg 5, first paragraph, Line 6: Where is Station “NHRIV700061102-18” located on Figure 1?
  - 15) Pg 5, first paragraph, Line 10: “brook” should be capitalized.
  - 16) Pg 5, second paragraph, Line 1: Change “the” to “this”.
  - 17) Pg 7, first paragraph, last sentence: add “it” before “occurred”.
  - 18) Pg 7, Figure 3: Is this figure in color, as it is difficult to distinguish seasonal points. The label of the horizontal axis is not clear “Percent of Flows Exceeding” should be clarified as it may be difficult for the public to understand.
  - 19) Pg 8, second line: Add “roadway” before “salt”.
  - 20) Pg 8, second paragraph, last sentence: It refers to 98% of watershed being “covered by MS4 Phase II program (Table 1)”. Later in the sentence it refers to 98.4%. Are they the same with the second one just rounded off? Is this 98% the same as the 98.4% of Urbanized Area shown in Table 1?
  - 21) Pg 8, Table 3: The Salt Imports are shown to one decimal place, except for Parking Lots. Drop the last “0”.
  - 22) Pg 8, Is “Food Waste” in Table 3 and elsewhere (Table 4, etc.) referring to septic system discharges?
  - 23) Pg 10, first line: The acronym “TMDL” was explained on Page 1. Is it necessary to do it again here?
  - 24) Pg 11, last paragraph: In the fourth and sixth lines, “four day” should be hyphenated.
  - 25) Pg 12, Figure 5: Should the title of this Figure be “TMDL Load Duration Curve at I-93-POL-01V” to clarify its specific location?
  - 26) Pg 12, last paragraph: The term “four day” in Line 7 needs to be hyphenated. Need to add another graph of % reduction and flows to illustrate where the PRG number of 24.5 is derived. We discussed possibly adding a figure to the appendix and referring to it.
  - 27) Pg 13, Table # 5, round all entries to the same decimal place (tenths).
  - 28) Pg 13, 5<sup>th</sup> line: Add acronym of “FHWA”.
  - 29) Pg 14, second paragraph under “i. Implementation Plan”, the last sentence says that future growth would necessitate additional load reductions. Would that reduction be expected to come from the same category (i.e., if a new parking lot was added, the allocation for parking lots would stay the same, thus reducing the tons/ac/yr allowed at existing parking lots?
  - 30) Pg 14, last paragraph: hyphenate “15 minute”.
  - 31) Pg 14, last paragraph: This text discusses future monitoring. Aren’t we going to perform the abatement actions (salt sheds, new salt spreader equipment, improved local storage and application practices, etc.) before this monitoring begins? If you know that you have violations and we do not institute some changes, won’t there continue to be violations?

Response: All but two of the comments are editorial. Comments 29 and 31 are relevant to the implementation plan, which has not yet been drafted. These comments will be carried forward to the Salt Reduction Workgroup to consider when developing the implementation plan.

---

Comments from the Conservation Law Foundation and the NH Rivers Council

1.1 The TMDL does not address impacts that can be associated with chlorides including instream, benthic, and riparian communities.

Category: No change

Response: The assessment unit for this TMDL is impaired for the aquatic life use support designated use. The EPA and DES standard for the protection of aquatic life is 230 mg Cl/L. DES conducted a review of the toxicological literature related to road salt (DES, 2007c). The report concluded that 230 mg Cl/L was the appropriate standard for the TMDL to be protective of humans, wildlife, aquatic organisms, and most vegetation. Therefore, by setting the TMDL at the level necessary to achieve the 230 mg Cl/L standard, the TMDL addresses impacts associated with chlorides on the instream, benthic, and riparian communities. See also the response to CLF et al. comment 5.2.

1.2 The TMDL does not ensure that water quality standards will be met in all locations in the watershed.

Category: No change

Response: For the study design, DES established continuous monitoring stations at the outlets of each of the four watersheds. Two of the watersheds were small (Dinsmore Brook and North Tributary to Canobie Lake) and the outlet stations were considered to be representative of the whole watershed. For the Policy-Porcupine and Beaver Brook watersheds, DES chose additional locations in the watersheds to represent worst-case conditions based on monitoring data from 2002-2006. Water quality at these worst-case stations was monitored continuously during the TMDL study. In both watersheds, the water quality was worse at the outlet station than at the "worst-case" station. In Policy-Porcupine Brook, the chronic water quality standard was violated for a total of 87.7 days at the outlet station (I93-POL-01V) compared to 66.0 days at the "worst case" station (I93-POL-04X) (DES, 2007b, Table 13). In Beaver Brook, water quality violations did not occur at either station; however, the average chloride concentration at the outlet station (09-BVR) was 67.58 mg/L compared to 55.86 mg/L at the "worst case" station (10A-BVR) (DES, 2007b, Table 10). Therefore, DES believes that attainment of the standards at the outlet stations should result in attainment of standards throughout the watershed.

1.3 The TMDL does not state when water quality standards will be met.

Category: Carry forward to implementation plan

Response: This comment is relevant to the implementation plan, which has not yet been drafted. The comment will be carried forward to the Salt Reduction Workgroup to consider when developing the implementation plan.

2.1 The salt import estimate for salt piles in the Policy Brook watershed should be the salt lost from piles not the salt in piles.

Category: No change

Response: The salt import estimate for salt piles in the TMDL is for salt lost from piles in the watershed. Please see pages 14-16 of the Data Report (DES, 2007b).

- 
- 3.1 The ten percent margin of safety is inadequate. A more protective margin of safety is needed.

Category: No change

Response: The margin of safety is to take into account any lack of knowledge, or scientific uncertainty, concerning the relationship between the loading targets and water quality standards. Here, the official TMDL for this study is the load duration curve shown in Figure 5. The basis of this curve is a 20-year flow record and the water quality standard. Therefore we believe that the targets are reasonably accurate and there is no need for a margin of safety greater than ten percent. While CLF et al.'s comments identify a number of scientific uncertainties related to chloride loadings, those uncertainties are relevant to determining how the TMDL will effectively be implemented, not to the TMDL itself.

- 3.2 The study does not address the impacts of future development in the watershed.

Category: No change

Response: The TMDL for the watersheds was set at the total amount of road salt that the watershed can assimilate. Aside from a margin of safety, all of the TMDL was allocated to existing sources. However, in Section 6(b)(i) the TMDL, it states that "any future construction of additional roads or parking lots in the TMDL watersheds would necessitate additional load reductions elsewhere in the watershed beyond the allocations in Table 5." Therefore, the provision for future growth in the watershed is a trading system between current and new sources.

- 3.3 The study should include an analysis of planned changes in drainages due to construction of the I-93 roadway.

Category: No change

Response: The official TMDL for this study is the load duration curve shown in Figure 5 which expresses the allowable load as the receiving stream flow multiplied by the chronic water quality criterion after reduction by a 10% safety factor. The TMDL targets are not dependent on drainage patterns due to construction of the I-93 roadway. Flow, drainage patterns and watershed salt loading are important considerations in determining current/future loads, magnitude of required reductions and implementation plans but do not change the TMDL targets.

- 3.4 The final allocations of loads by sector should be made available for public review and comment.

Category: Accept

Response: The allocations of loads will be developed by the Salt Reduction Workgroup, which is a public process. In response to other comments (see CLF et al. comment 6.1), additional members will be added to this group. DES will add an opportunity to comment on draft allocations developed by this group. If necessary, DES will amend the TMDL to incorporate more specific wasteload allocations following public comment.

- 3.5 The allocations of loads should be split into more categories (e.g., by sector and by town or DOT patrol shed).

Category: Accept

---

Response: The Tables 3 and 5 in the TMDL will be revised to stratify both the salt import estimates for FY07 and the allocations of loads by town and patrol shed.

3.6 The TMDL should ensure that violations of the acute water quality standard for chlorides do not occur.

Category: No change

Response: The TMDL was based on the chronic standard for chlorides because this standard was violated far more frequently than the acute standard. The chronic standard is also lower than the acute standard (230 and 860 mg/L, respectively). Therefore, if the chronic standard is met, acute violations are unlikely. Of all of the stations monitored for the TMDL, there were only two where acute violations occurred but chronic violations did not (08-SHB and I93-BVRU03-01). These violations occurred for a total of 5 hours out of the 84,960 hourly average measurements made at all of the sites. Therefore, the 10 percent margin of safety for the TMDL should be sufficient to protect against the likelihood of this occurrence (0.006%).

3.7 The TMDL should be established with daily load allocations, not yearly.

Category: No change

Response: For this study, the TMDL, wasteload allocation, and load allocation are shown on the load duration curve shown in Figure 5. The units for this curve are tons of chloride per day, which meets the requirements of expressing the load allocations as daily loads.

4.1 The final implementation plan should be made available for public review and comment.

Category: Accept

Response: The final implementation plan will be developed by the Salt Reduction Workgroup, which is a public process. In response to other comments (see CLF et al. comment 6.1), additional members will be added to this group. DES will add an opportunity to comment on implementation plan developed by this group.

5.1 Monitoring in the watersheds should continue year-round to capture violations in the summer.

Category: No change

Response: The sampling design for the long-term monitoring program is for year-round monitoring at station I93-POL-01V in the Policy-Porcupine Brook watershed.

5.2 The implementation monitoring plan should include biomonitoring to detect direct impacts to aquatic life.

Category: Accept

Response: Until the water quality standards for chloride have been achieved in the TMDL watersheds, biomonitoring is not necessary because impacts to aquatic resources have already been demonstrated through water quality monitoring. However, DES agrees that biomonitoring should be completed after water quality standards for chloride have been met to verify that there are no additional impacts to aquatic life from chlorides

---

or other contaminants. Aquatic life may be affected by sources other than road salt in these watersheds.

5.3 The implementation monitoring plan should include stations throughout the watershed to detect “hot spots” of chloride concentrations.

Category: No change

Response: See response to CLF et al. comment 1.2.

5.4 Implementation monitoring must not be “pending resources”. A fully-funded monitoring program is critical.

Category: No change

Response: DES agrees that a fully-funded program is necessary. However, State and federal funding for water quality monitoring in the future cannot be guaranteed. Therefore, all programs must be considered to be “pending the availability of resources”.

6.1 The Salt Reduction Workgroup should have members from pertinent watershed associations and state-wide environmental organizations.

Category: Accept

Response: DES agrees that representatives from pertinent watershed associations and state-wide environmental organizations should be invited to join the workgroup.

#### Comments from the Sierra Club

1.1 The boundaries of the stream segment should be justified based on monitoring data.

Category: No change

Response: In 2002, DES created assessment units for all stream segments in the state. The segments were developed using a standardized process described in the memorandum dated March 29, 2002. Monitoring in a variety of locations near the I-93 roadway in 2002-2006, detected chloride violations in one of the assessment units for Policy-Porcupine Brook. The reported water quality violation triggered the need for a TMDL study of this assessment unit. For the TMDL study, DES delineated a watershed which contributed to the impaired assessment unit. The outlet of the watershed was set at the furthest downstream location in the impaired assessment unit where a temporary stream gage could be installed (station I93-POL-01V). All of the contributing assessment units upstream of that station were included as the TMDL study area. Therefore, monitoring data were used to select the assessment unit for the TMDL study and hydrology was used to define the watershed boundaries of the study area.

2.1 The TMDL should inventory NPDES permits for chloride discharges.

Category: No change

Response: DES obtained information on NPDES-permitted discharges in the study watersheds. None of the discharges had numeric limits for chlorides and none of the permittees were required to provide monitoring data on chloride loads. No municipal wastewater treatment facilities discharge in the study watersheds. Therefore, an inventory

---

of NPDES permittees will provide no additional information about chloride loads to the watersheds.

- 4.1 The TMDL should not be based on the percent reduction goal relative to FY07 because FY07 was a mild year.

Category: Accept

Response: The official TMDL is the load duration curve in Figure 5. The TMDL is not based on FY07 conditions, but rather on a twenty-year flow record. The source of the confusion is Table 5. The allocation of loads in Table 5 is an alternative expression of the TMDL to aid in developing the implementation plan. The percent reduction values were added to Table 5 to provide a reference to FY07 conditions. DES agrees that including the percent reduction values on this table is confusing. The percent reduction values will be removed from Table 5.

- 5.1 The allocations of loads in the TMDL are only draft. There should be opportunity to comment on the final allocations.

Category: Accept

Response: See response to CLF et al. comment 3.4.

- 5.2 The TMDL should be established with daily load allocations, not yearly.

Category: No change

Response: See response to CLF et al. comment 3.7.

- 5.3 The TMDL does not have an implementation plan.

Category: Accept

Response: See response to CLF et al. comment 4.1.

- 5.4 The TMDLs do not provide for the expected growth from the I-93 expansion.

Category: No change

Response: See response to CLF et al. comment 3.2.

- 5.5 The TMDL does not include an enforcement plan for private chloride discharges.

Category: Carry forward to implementation plan

Response: This comment is relevant to the implementation plan, which has not yet been drafted. The comment will be carried forward to the Salt Reduction Workgroup to consider when developing the implementation plan.

#### Comments from Geoffrey Ransom of Baldwin, Callen & Ransom PLLC

1. The TMDL must be reduced to restore water quality in the impacted areas. Proposed widening of I-93 has the expected potential of significantly increasing the chloride limits from the use of road salt. I support DES's protection of the identified watercourses and strongly urge DES's legislative and political support of public transit/trains in lieu of the proposed widening of I-93.

Category: No change

Response: Comment noted. No change requested.

## 8. References

- DES. 2005. Section 305(b) and 303(d) Consolidated Assessment and Listing Methodology. NH Department of Environmental Services, Watershed Management Bureau, Concord, NH. November 2005. Available from: [www.des.nh.gov/WMB/swqa/calm.html](http://www.des.nh.gov/WMB/swqa/calm.html).
- DES. 2006. Total Maximum Daily Loads for Chloride for Waterbodies in the Vicinity of the I-93 Corridor from Massachusetts to Manchester, NH: Quality Assurance Project Plan. NH Department of Environmental Services, Watershed Management Bureau, Concord, NH. June 30, 2006. Available from [www.rebuildingi93.com/content/environmental/waterquality](http://www.rebuildingi93.com/content/environmental/waterquality).
- DES. 2007a. Total Maximum Daily Loads for Chloride for Waterbodies in the Vicinity of the I-93 Corridor from Massachusetts to Manchester, NH: Data Quality Audit. NHDES-R-WD-07-39. NH Department of Environmental Services, Watershed Management Bureau, Concord, NH. August 17, 2007.
- DES. 2007b. Total Maximum Daily Loads for Chloride for Waterbodies in the Vicinity of the I-93 Corridor from Massachusetts to Manchester, NH: Data Report. NHDES-R-WD-07-40. NH Department of Environmental Services, Watershed Management Bureau, Concord, NH. September 2007.
- DES. 2007c. Hazard Identification for Human and Ecological Effects of Sodium Chloride Road Salt. NH Department of Environmental Services, Watershed Management Bureau, Concord, NH. June 6, 2007.
- EPA. 1991. Technical Support Document for Water Quality-based Toxics Control. EPA/505/2-90-001. US Environmental Protection Agency, Office of Water, Washington, DC. March 1991.
- EPA. 2002. Establishing Total Maximum Daily Load (TMDL) Waste Load Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirements Based on those WLAs. Memorandum from Robert Wayland III, US Environmental Protection Agency, Office of Water, Office of Wetlands, Oceans, and Watersheds, Washington, DC. November 22, 2002.
- EPA. 2007. An Approach for Using Load Duration Curves in the Development of TMDLs. EPA 841-B-07-006. U.S. Environmental Protection Agency, Office of Wetlands, Oceans and Watersheds, Washington, D.C. August 2007. Available from: [www.epa.gov/owow/tmdl/techsupp.html](http://www.epa.gov/owow/tmdl/techsupp.html).

Hall, F.J. 1975. Chloride in Natural Waters of New Hampshire: New Hampshire Agricultural Experiment Station Bulletin 504, University of New Hampshire, Durham.

Sassan, D, and Kahl, S. 2007. Salt Loading Due to Private Winter Maintenance Practices. Plymouth State University, Center for the Environment, Plymouth, NH. June 30, 2007.